



FEATURES

- ▼ Corrosion resistant fiber glass reinforced polyester housing.
- ▼ Available in one lamp and two lamp fluorescent and two lamp and four lamp compact fluorescent.
- ▼ Impact resistant acrylic lens as standard with optional polycarbonate.
- ▼ Non-metallic latches.
- ▼ Available in 120v 60Hz as standard, with optional voltages in 220v 50Hz, 220v 60Hz and 277v 60Hz.
- ▼ 5 year warranty.

APPROVALS

- ▼ CSA
- ▼ Type 3R Enclosure
- ▼ Enclosed and Gasketed
- ▼ Conforms to IP 65

APPLICATIONS

- ▼ Marine and wet environments
- ▼ Damp locations
- ▼ Indoor or outdoor use
- ▼ Arduous industrial environments


OPTIONS

To obtain a luminaire with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- | | |
|--|------|
| ▼ Emergency Ballast | EM* |
| ▼ Polycarbonate Lens | P |
| ▼ Switch | S |
| ▼ Stainless Steel Latches | SSC |
| ▼ 120-277 50/60Hz (17, 24, 32, 35, 54 & 60w) | -127 |
| ▼ 220v 50Hz | -225 |
| ▼ 220v AC 60Hz | -226 |
| ▼ 277v AC 60Hz | -276 |

*Not available in 17w, 20w & 24w

DIMENSIONS

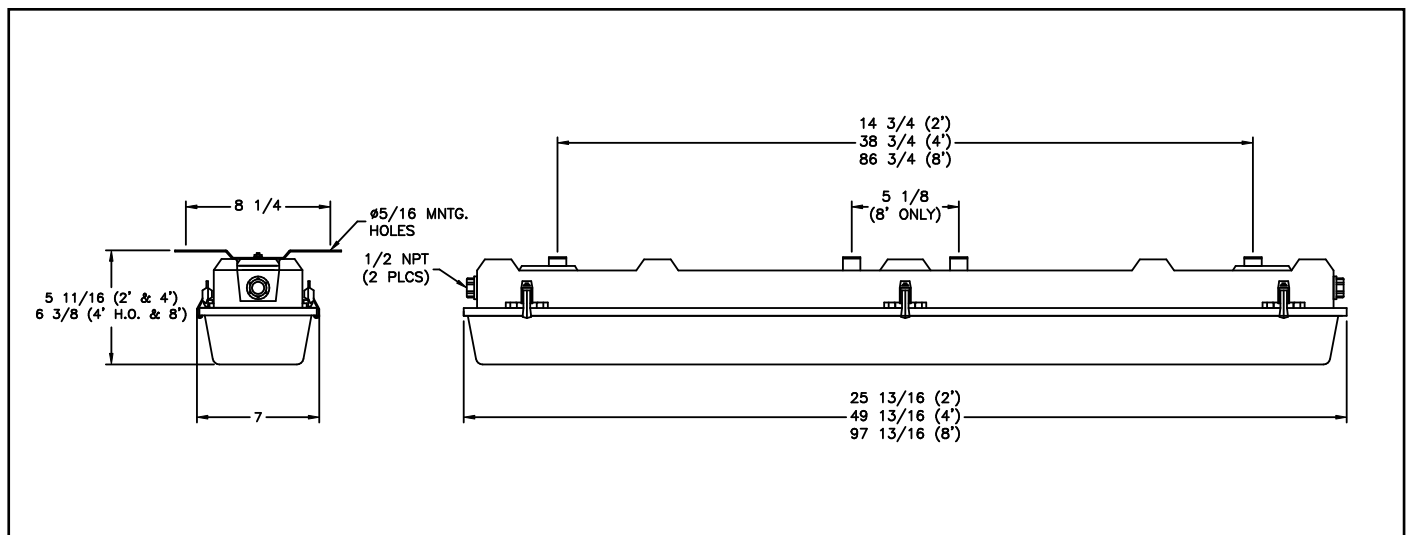

Dimensions in inches

Note: Drawing shown with Stainless Steel Latches (SSC) option.



LUMINAIRE TECHNICAL SPECIFICATIONS

HOUSING AND LENS

Housing in fiber glass reinforced polyester with impact resistant lens in acrylic. Optional polycarbonate lens also available.

REFLECTORS

Steel channel gloss painted in white.

GASKETS

One continuous sponge neoprene gasket.

BALLAST

Supplied in 120v 60Hz as standard. Other voltage options and emergency ballasts also available. All ballast electronic with the exception of 20w T12. Magnetic ballasts are available, please contact factory.

LAMP TYPE

Luminaires are available in 17w, 20w, *24w, 32w, 40w, *54w, 60w, 75w and 110w in 2 lamp fluorescent versions. Compact fluorescent versions are available in 2 lamp and four lamp 40w versions. Luminaires are supplied without lamps. *Approval pending.

MOUNTING

Two stainless mounting brackets provided with each luminaire.

OUTLETS

Supplied with a 1/2" NPT outlet at each end as standard providing a thru-feed service.

ORDERING REFERENCES

FLUORESCENT & COMPACT FLUORESCENT LUMINAIRES

| WORKED ORDERING EXAMPLE | 1. | 2. | 3. | 4. |
|--|----|------------------------|----|--------------------------------------|
| 2 lamp 32W fluorescent Ceiling mounted with an emergency ballast | FP | 2 | 32 | EM |
| 1. SERIES | | 3. LAMP WATTAGE | | 4. OPTIONS |
| FP Fiberglass Reinforced Polyester | | 17 17 Watt T-8 | | EM Emergency Ballast |
| FPC Compact Fluorescent Lamps (40w) | | 20 20 Watt T-12 | | P Polycarbonate Lens |
| | | 24 24 Watt T-5 | | S Switch |
| 2. NUMBER OF LAMPS | | 32 32 Watt T-8 | | SSC Stainless Steel Latches |
| 1 One Lamp | | 35 35 Watt T-12 | | 5. OPTIONAL VOLTAGE/FREQUENCY |
| 2 Two Lamps | | 40 40 Watt T-12 | | Blank 120v AC 60Hz |
| 4 Four Lamps (CF 40w only) | | 54 54 Watt T-5 | | -225 220v AC 50Hz |
| | | 60 60 Watt T-12 | | -226 220v AC 60Hz |
| | | 75 75 Watt T-12 | | -276 227v AC 60Hz |
| | | 110 110 Watt T-12 | | |

SPARE PARTS

| ACRYLIC LENS | BALLASTS | LAMPHOLDERS | LAMPS |
|--------------------------|-------------------|--------------------------------|--------------------------------|
| 2 ft FX2203 | 1 x 17w FX5173 | Stationary | 17w Fluorescent FX3528 |
| 4 ft FX2204 | 1 x 20w FX5009 | Spring | 20w Fluorescent FX3506 |
| 8 ft FX2225 | 1 x 24w FX5307 | 17, 20, 32, & 40w FX4059 | 24w Fluorescent FX3568 |
| LATCHES | 1 x 32w FX5173H | 24, 54w FX4064 | 32w Fluorescent FX3527 |
| Plastic FX8043 | 1 x 35w FX5027 | 35 & 60w FX4004 and FX4005 | 35w Fluorescent FX3507 |
| MOUNTING BRACKETS | 1 x 40w FX5011 | 75w FX4017 and FX4018 | 40w Fluorescent FX3504 |
| Stainless Steel FX7036 | 1 x 54w FX5305 | 110w FX4004 and FX4005 | 54w Fluorescent FX3567 |
| Cornet Mount Kit FX7089 | 1 x 60w FX5027 | 40w Compact Fluorescent FX4043 | 60w Fluorescent FX3507 |
| | 1 x 75w FX5098 | | 75w Fluorescent FX3523 |
| | 1 x 110w FX5027 | | 110w Fluorescent FX3545 |
| | 2 x 40w CF FX5272 | | 40w Compact Fluorescent FX3533 |