



FEATURES

- ▼ Wall or bulkhead mount.
- ▼ Galvanized steel, corrosion resistant housing with an oven-cured polyester powder coat protective finish.
- ▼ Knurled thumb screws for easy lamp replacement and maintenance.
- ▼ Available in one 15w version.
- ▼ 120v 60Hz voltage operation as standard. Other options available.
- ▼ Equipped with a 3 pole terminal block.
- ▼ 5 year warranty.

APPROVALS

- ▼ UL 1598A - Marine Inside Type
- ▼ ABS
- ▼ Conforms to IP 44*

* When ordered with NSP option, otherwise conforms to IP 40.

APPLICATIONS

- ▼ Marine inside environments
- ▼ Accommodation modules / cabin sections
- ▼ Drill ships and exploration vessels
- ▼ Ferries
- ▼ Oil and gas platforms
- ▼ Tankers
- ▼ Passenger ships


OPTIONS

To obtain a luminaire with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- | | |
|-----------------------------|------|
| ▼ 15 amp Convenience Outlet | CO* |
| ▼ No Switch Provided | NSP |
| ▼ 220V 50Hz | -225 |
| ▼ 220V 60Hz | -226 |
| ▼ Lamps Included | L |

* 120V only (conforms to IP 40)

DIMENSIONS

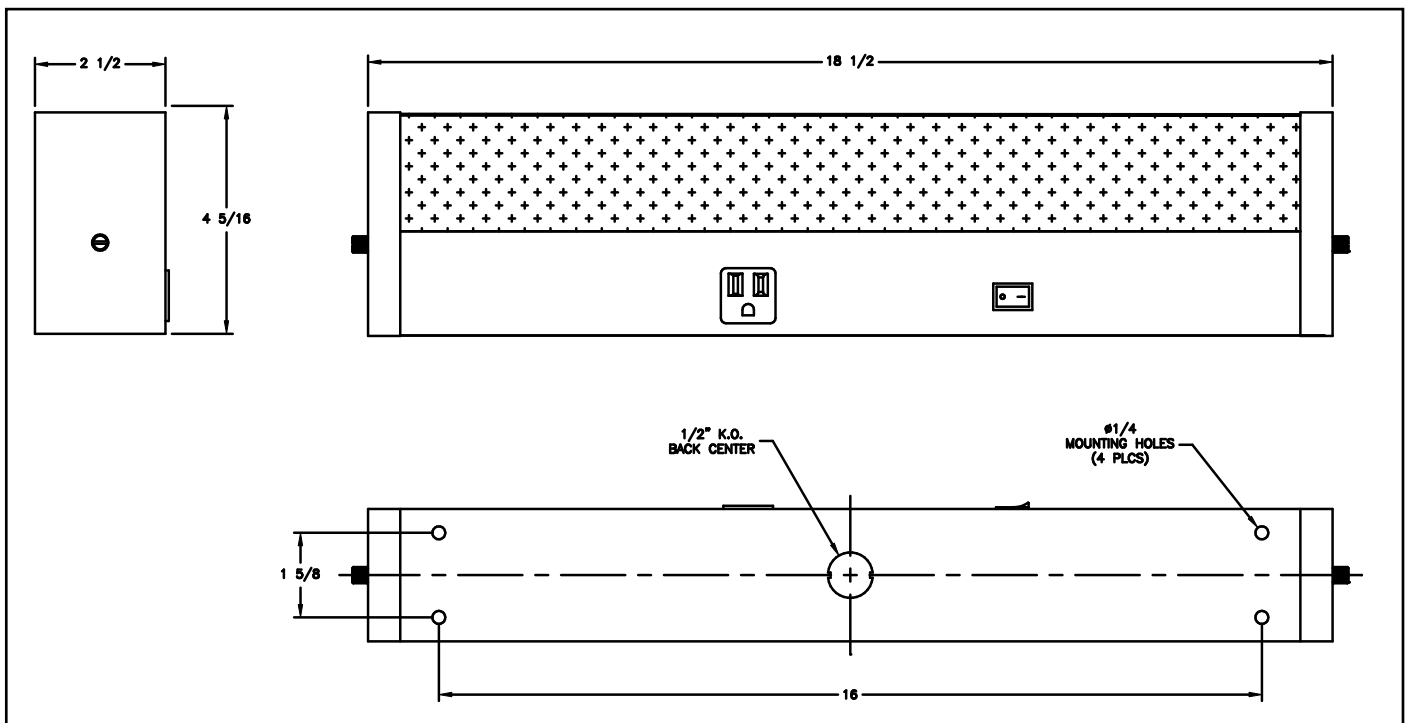

Dimensions in inches



LUMINAIRE TECHNICAL SPECIFICATIONS

HOUSING

Galvanized steel with a corrosion resistant white oven-cured polyester powder coat high gloss protective finish.

END CAPS

Galvanized steel with a corrosion resistant white oven-cured polyester powder coat high gloss protective finish. Knurled thumb screws allow for easy lamp replacement and maintenance.

REFLECTOR

Galvanized steel with reflective finish, light shines out and down.

OUTLETS

Supplied with one 1/2" NPT knockout centered on back of each luminaire.

LENS

A clear prismatic high impact DR acrylic lens is provided.

LAMP HOLDER

Twist lock fluorescent lamp holders are supplied with each luminaire.

TERMINAL BLOCK

Equipped with a 3 pole terminal block.

MOUNTING

Through four 1/4" Ø mounting holes on the back of each luminaire.

VOLTAGE OPERATION

Rated for operation on 120v AC 60Hz as standard. A 220v AC 50Hz and 220v AC 60Hz options are also available.

LAMP TYPE

The FMR115 type is suitable for one 15w T8 fluorescent. Lamps are not included, unless option "L" is selected.

BALLAST

High Power Factor (HPF) electronic ballast.

ORDERING REFERENCES

INSIDE TYPE FLUORESCENT BERTH/MIRROR LUMINAIRES			
DESCRIPTION	LAMP SIZE	WEIGHT (LBS)	MODEL NUMBER
Berth and Mirror Luminaire	1 x 15w	3.5	FMR115

SPARE PARTS

LENS	FX2234
LAMP HOLDERS	FX4048
BALLASTS	FX5206
LAMPS	FX3508
SWITCH	FX3049
CONVENIENCE OUTLET	CX3001