



FEATURES

- ▼ Double pole rotary switches rated for operation on 20 Amp 240v AC max, supplied standard on select models.
- ▼ Choice of corrosion resistant enclosures in cast marine brass or copper free aluminum.
- ▼ Receptacles are supplied with 2P3W (U-Ground, Straight Blade type) 125v AC 15/20 Amp interior. 250v AC units are available as an option.
- ▼ Receptacles will accept 15 or 20 Amp plugs.
- ▼ 5 year warranty.

APPROVALS

- ▼ NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ▼ ABS
- ▼ Type 4X
- ▼ Conforms to IP 66

APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

OPTIONS

To obtain a luminaire with one of the following options listed below add the following suffix:

- ▼ 250v AC -250 (Replace -125 suffix)

DIMENSIONS

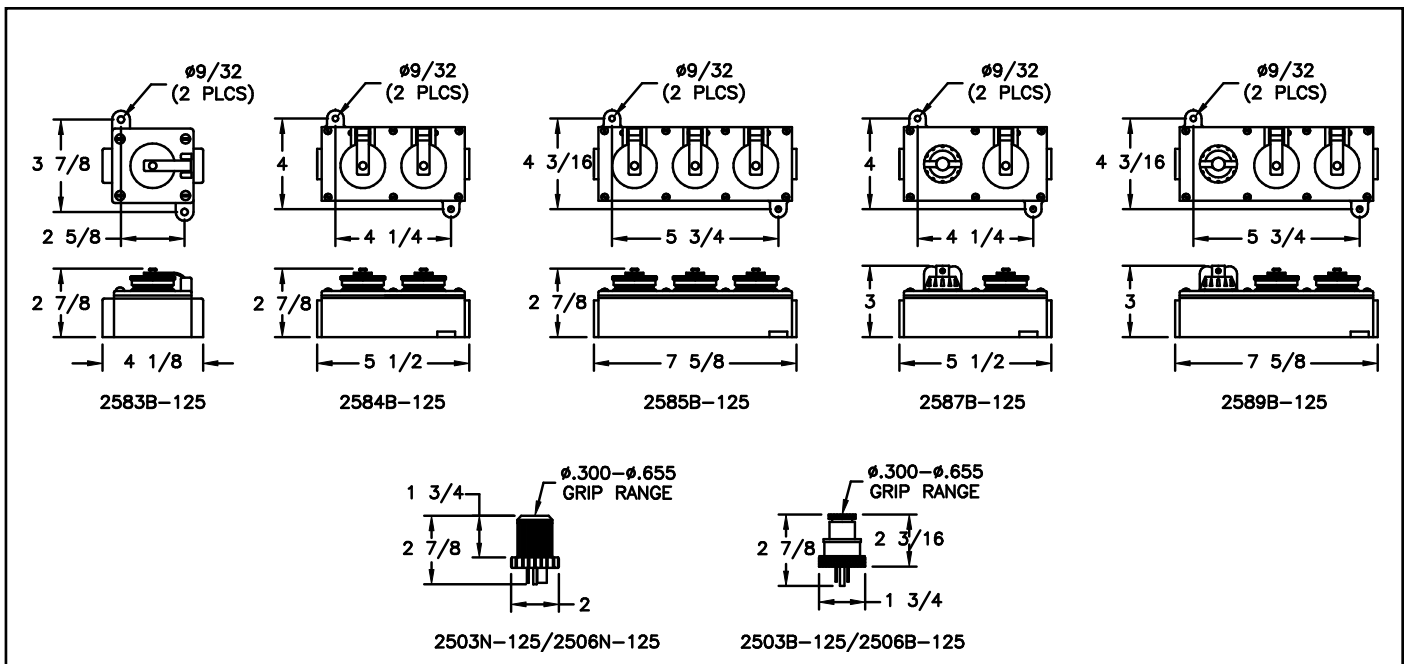

Dimensions in inches



TECHNICAL SPECIFICATIONS

HOUSING

Cast marine brass or copper free aluminum with a natural finish.

HARDWARE

Stainless steel.

OUTLETS

All units are furnished blank but can be supplied with up to two 3/4" NPT outlets. Please state requirements on application.

VOLTAGE OPERATION SWITCHES

Double pole rotary switches are available for operation up to 20 Amp 240v AC max.

RECEPTACLES

Supplied with a 2P3W U-Ground Straight Blade type 125v AC 15/20 Amp interior. 250v is available as an option.

ORDERING REFERENCES

MARINE WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE MOUNT					
DESCRIPTION	AMP	MARINE BRASS TYPE (B)	MARINE BRASS WEIGHT (lbs)	ALUMINUM TYPE (A)	ALUMINUM WEIGHT (lbs)
One Receptacle	20	2583B-125	3.0	2583A-125	1.0
Two Receptacles	20	2584B-125	4.0	2584A-125	1.5
Three Receptacles	20	2585B-125	7.0	2585A-125	2.5
One Receptacle with Double Pole Switch	20	2587B-125	4.0	2587A-125	1.5
Two Receptacles with Double Pole Switch	20	2589B-125	6.0	2589A-125	2.1
Metal Plug	15	2503B-125	0.8	2503A-125	0.8
	20	2506B-125	0.8	2506A-125	0.8
Nylon Plug	15	2503N-125	0.5	2503N-125	0.5
	20	2506N-125	0.5	2506N-125	0.5

SPARE PARTS					
COVERS One Receptacle Two Receptacles Three Receptacles One Receptacle with Switch Two Receptacles with Switch	MARINE BRASS (B) INX6526B INX6527B INX6528B INX6529B INX6530B	ALUMINUM (A) INX6526A INX6527A INX6528A INX6529A INX6530A	NOB AND SHAFT ASSEMBLY Marine Brass Aluminum	INX8002B INX8002A	
			15 AMP 125V INTERIORS Nylon Plug	2503NR-125	
	BOXES One Receptacle Two Receptacles Three Receptacles One Receptacle with Switch Two Receptacles with Switch	MARINE BRASS (B) INX6002B INX6003B INX6014B INX6003B INX6014B	ALUMINUM (A) INX6002A INX6003A INX6014A INX6003A INX6014A	15 AMP 250V INTERIORS Nylon Plug	2503NR-250
				20 AMP 125V INTERIORS Receptacle Nylon Plug	INX3181 2506NR-125
					20 AMP 250V INTERIORS Receptacle Nylon Plug
GASKETS One Receptacle Two Receptacles Three Receptacles One Receptacle with Switch Two Receptacles with Switch	GKT4000 GKT5001 GKT5028 GKT5001 GKT5028		CAPS Marine Brass Aluminum	INX8008B INX8008A	
			SWITCHES Double Pole	INX3192	