



FEATURES

- ▼ Double pole rotary switches rated for operation on 20 Amp 240v AC max supplied standard on select models.
- ▼ Choice of corrosion resistant enclosures in cast marine brass or copper free aluminum with optional plugs.
- ▼ Receptacles and plugs are pin and sleeve Pauluhn type rated for operation on 125v AC. The 2P3W units can be supplied in 250v, 277v and 480v AC versions while the 3P4W units can be supplied in 208v, 250v, 480v or 600v AC versions.
- ▼ Single gang units available in optional reverse service.
- ▼ Brass pin and sleeve interior with ABS insulator.
- ▼ 5 year warranty.

APPROVALS

- ▼ ABS
- ▼ Type 4X
- ▼ Conforms to IP 66

APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

OPTIONS

To obtain a luminaire with one of the following options listed below add the following suffix (not all options can be combined):

- | | |
|--|---------------------|
| ▼ 208v (3P4W units only) | -208 (Replace -125) |
| ▼ 250v (All units) | -250 (Replace -125) |
| ▼ 277v (2P3W units only) | -277 (Replace -125) |
| ▼ 480v (All units) | -480 (Replace -125) |
| ▼ 600v (3P4W units only) | -600 (Replace -125) |
| ▼ Reverse Service (Single gang units only) | RS |

DIMENSIONS

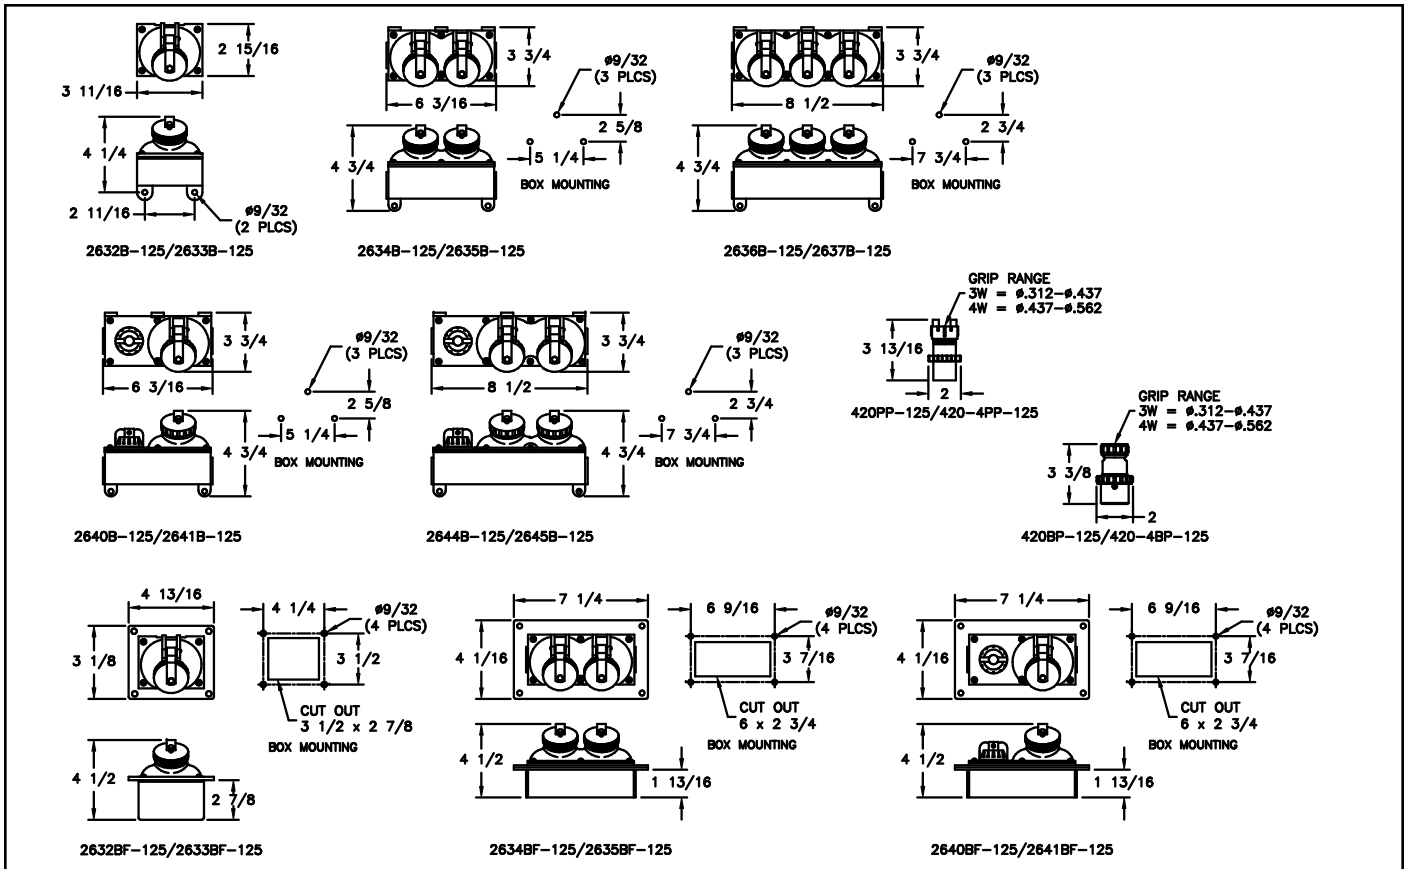

Dimensions in inches

**MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS
WATERTIGHT SWITCHES AND RECEPTACLES
FOR SURFACE OR FLUSH MOUNT**



TECHNICAL SPECIFICATIONS

HOUSING

Cast marine brass or copper free aluminum with a natural finish.

MOUNTING

Units are available for surface or flush mounting.

HARDWARE

Stainless steel.

VOLTAGE OPERATION

Double pole rotary switches are available for operation on 20 Amp 240v AC max.

OUTLETS

All units are furnished blank but can be supplied with up to two $\frac{3}{4}$ " NPT outlets. Please state requirements on application.

PLUGS AND RECEPTACLES

Pin and sleeve Pauluhn type supplied for operation on 125v AC. Options for 2P3W units include 250v, 277v and 480v. 3P4W unit options are 208v, 250v, 480v and 600v. Single gang units may be supplied in reverse service.

ORDERING REFERENCES

MARINE WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE AND FLUSH MOUNT					
DESCRIPTION	MARINE BRASS WT(lbs)	MARINE BRASS (B) TYPE 2P3W	ALUMINUM (A) TYPE 2P3W	MARINE BRASS (B) TYPE 3P4W	ALUMINUM (A) TYPE 3P4W
One Receptacle for Surface Mount	2.8	2632B-125	2632A-125	2633B-125	2633A-125
Two Receptacles for Surface Mount	4.8	2634B-125	2634A-125	2635B-125	2635A-125
Three Receptacles for Surface Mount	6.5	2636B-125	2636A-125	2637B-125	2637A-125
One Receptacle with Double Pole Switch for Surface Mount	4.8	2640B-125	2640A-125	2641B-125	2641A-125
Two Receptacles with Double Pole Switch for Surface Mount	6.5	2644B-125	2644A-125	2645B-125	2645A-125
One Receptacle for Flush Mount	3.5	2632BF-125	2632AF-125	2633BF-125	2633AF-125
Two Receptacles for Flush Mount	5.8	2634BF-125	2634AF-125	2635BF-125	2635AF-125
One Receptacle with Double Pole Switch for Flush Mount	5.8	2640BF-125	2640AF-125	2641BF-125	2641AF-125
Metal Plug	0.8	420BP-125	420AP-125	420-4BP-125	420-4AP-125
Plastic Plug	0.3	420PP-125	420PP-125	420-4PP-125	420-4PP-125

SPARE PARTS

SURFACE MOUNT UNITS		MARINE BRASS COVER	ALUMINUM COVER	MARINE BRASS BOX	ALUMINUM BOX	GASKETS	
One Receptacle		INX6532B	INX6532A	INX6015B	INX6015A	GKT5002	
Two Receptacles		INX6533B	INX6533A	INX6016B	INX6016A	GKT6007	
Three Receptacles		INX6534B	INX6534A	INX6017B	INX6017A	GKT5022	
One Receptacle with Switch		INX6535B	INX6535A	INX6016B	INX6016A	GKT6007	
Two Receptacles with Switch		INX6637B	INX6637A	INX6017B	INX6017A	GKT5022	
FLUSH MOUNT UNITS		MARINE BRASS COVER	ALUMINUM COVER	MARINE BRASS BOX	ALUMINUM BOX	COVER GASKET	BOX GASKET
One Receptacle		INX6532B	INX6532A	INX6018B	INX6018A	GKT5002	GKT5029
Two Receptacles		INX6533B	INX6533A	INX6019B	INX6019A	GKT6007	GKT5030
One Receptacle with Switch		INX6535B	INX6535A	INX6019B	INX6019A	GKT6007	GKT5030
INTERIORS	2P3W	3P4W	KNOB AND SHAFT ASSEMBLY		RECEPTACLE ADAPTERS		
Receptacle	INX3022-125	INX3023-125	Marine Brass	INX8002B	2P3W 125V to 5-20R	INX3242PR-125	
Metal Plug	INX3143-125	INX3147-125	Aluminum	INX8002A	2P3W 125v to 6-20R	INX3242PR-250	
Plastic Plug	INX3103-125	INX3105-125					
SWITCHES	Double Pole	INX3192	CAPS				
			Marine Brass	INX8004B			
			Aluminum	INX8004A			