



## FEATURES

- ▼ Choice of 15 Amp receptacles, pilot lights, single pole or 3 way switches dependant on type.
- ▼ Switches are available in 125v or 277v AC max. Receptacles are available in 125v AC max and pilot lights in 120v AC max.
- ▼ Choice of corrosion resistant enclosures in cast marine brass, copper free aluminum or non-metallic.
- ▼ Pilot light features a  $\frac{1}{4}$  watt neon lamp which lights during activation.
- ▼ 5 year warranty.

## APPROVALS

- ▼ NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ▼ ABS
- ▼ Conforms to IP 20

## APPLICATIONS

- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships


## OPTIONS

To obtain a luminaire with one of the following options listed below add the following suffix:

- ▼ Flush Mount Unit

F

## DIMENSIONS

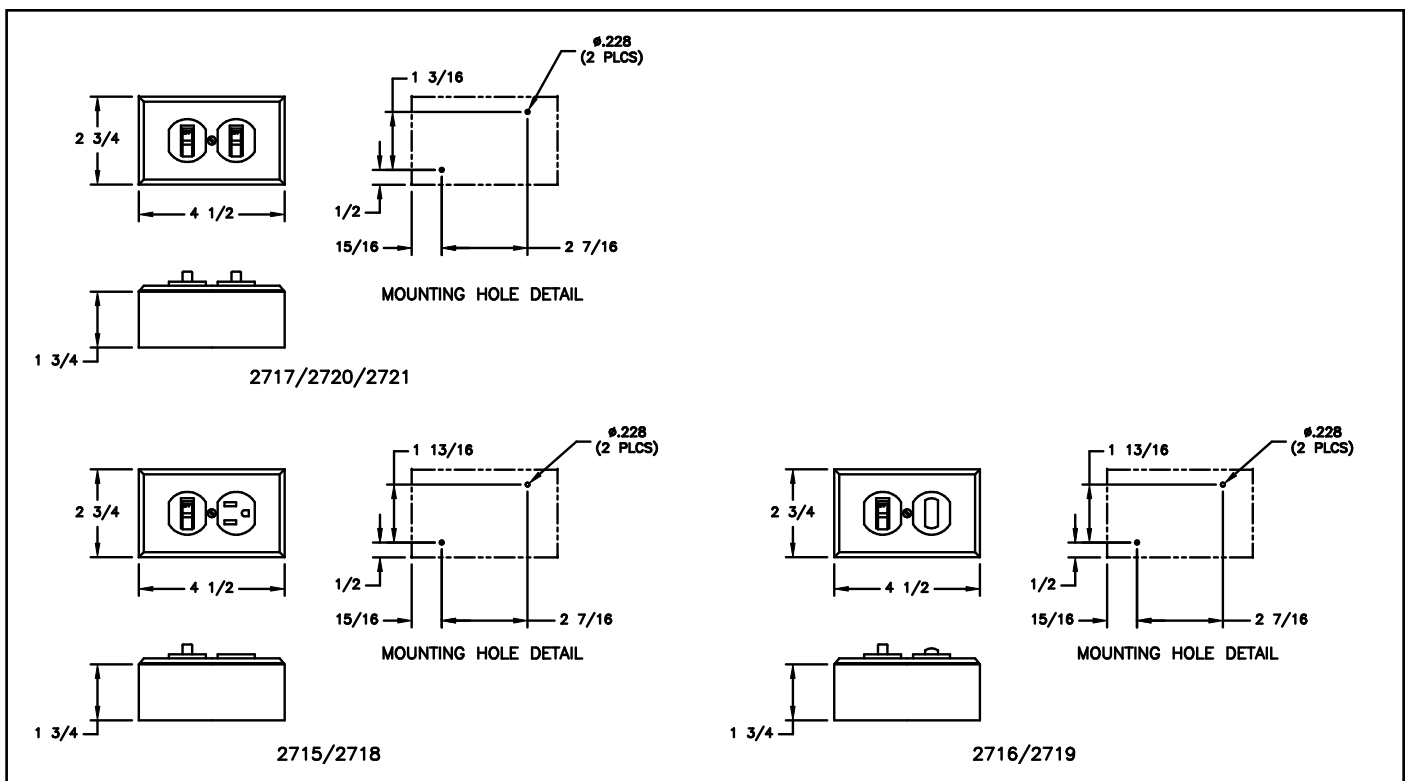

Dimensions in inches



**TECHNICAL SPECIFICATIONS**

**HOUSING**

Cast marine brass, copper free aluminum or non-metallic. The metallic units have boxes with a natural finish and covers in a brush finish. Marine Brass units are supplied with marine brass covers and aluminum units with stainless steel covers.

**HARDWARE**

Stainless steel for all types.

**OUTLETS**

All units are furnished blank. They can be supplied with up to two  $\frac{3}{4}$ " NPT outlets as an option. Please state requirements on application.

**PILOT LIGHT**

Features a  $\frac{1}{4}$  watt neon lamp which lights during activation.

**RECEPTACLES VOLTAGE OPERATION**

Rated for operation on 125v AC max on 15 Amp with NEMA 5-15R configuration.

**SWITCHES**

All units are furnished with single row switches rated for operation on 125v or 277v AC max 15 Amp.

**PILOT LIGHTS**

Rated for operation on 125v AC max on 15 Amp.

**ORDERING REFERENCES**

MARINE INSIDE TYPE SWITCHES AND RECEPTACLES						
DESCRIPTION	AMP	VOLTAGE	MARINE BRASS WT (lbs)	MARINE BRASS TYPE	ALUMINUM TYPE	NON-METALLIC TYPE
One Receptacle with Single Pole Switch	15	277v AC Max	2.0	2715B	2715A	2715PL
One Receptacle with 3 Way Switch	15	125v AC Max	2.0	2718B	2718A	2718PL
Two Single Pole Switches	15	277v AC Max	2.0	2717B	2717A	2717PL
One Single Pole Switch and One Three Way Switch	15	277v AC Max	2.0	2720B	2720A	2720PL
Two Three Way Switches	15	277v AC Max	2.0	2721B	2721A	2721PL
One Single Pole Switch and Pilot Light	15	120v AC Max	2.0	2716B	2716A	2716PL
One Three Way Switch and Pilot Light	15	120v AC Max	2.0	2719B	2719A	2719PL

SPARE PARTS			
<b>INTERIORS</b>		<b>FLUSH COVERS (ALL UNITS)</b>	
Receptacle with Single Pole Switch	INX3201	Marine Brass	INX6689B
Receptacle with Three Way Switch	INX3229	Aluminum	INX6689A
Two Single Pole Switches	INX3199	Non-Metallic	INX6689PL
Two Three Way Switches	INX3232		
One Single Pole and One Three Way Switch	INX3231		
Pilot and Single Pole Switch	INX3200		
Pilot and Three Way Switch	INX3230		
<b>BOX (ALL UNITS)</b>		<b>STANDARD COVER (ALL UNITS)</b>	
Marine Brass	INX6033B	Marine Brass	INX6685B
Aluminum	INX6033A	Aluminum	INX66853A
Non-Metallic	INX6033PL	Non-Metallic	INX6685PL