



FEATURES

- ▼ Choice of 15 or 20 Amp plugs.
- ▼ Rated for voltage operation on 125v, 250v, 277v or 600v max AC dependant on type.
- ▼ Choice of corrosion resistant enclosures in cast marine brass, copper free aluminum or non-metallic.
- ▼ Single or double pole switches.
- ▼ 3 way or 4 way switches.
- ▼ Receptacles will accept 15A or 20A plugs.
- ▼ 5 year warranty.

APPROVALS

- ▼ NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ▼ ABS
- ▼ Conforms to IP 20

APPLICATIONS

- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships


OPTIONS

To obtain a luminaire with one of the following options listed below add the following suffix (not all options can be combined):

- | | |
|---|------|
| ▼ 120v Ground Fault Circuit Interrupter | GF* |
| ▼ Flush Mount Unit | F |
| ▼ 20A 250v AC | -250 |

* For double receptacle 120v only.

DIMENSIONS

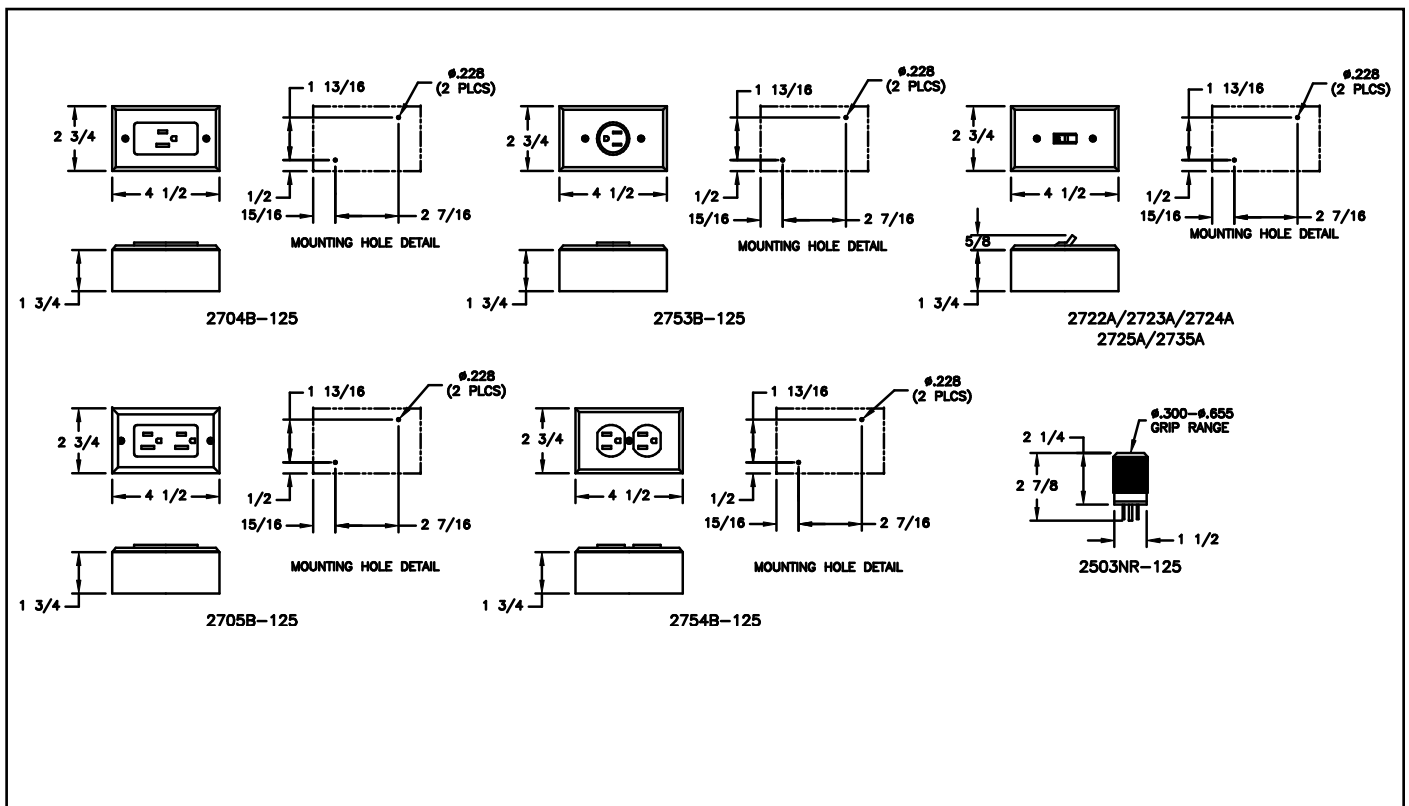

Dimensions in inches

TECHNICAL SPECIFICATIONS

HOUSING

Cast marine brass, copper free aluminum or non-metallic. The metallic units have boxes with a natural finish and covers in a brush finish. Marine Brass units are supplied with marine brass covers and aluminum units with stainless steel covers.

HARDWARE

Stainless steel for all types

OUTLETS

All units are furnished blank. They can be supplied with up to two $\frac{3}{4}$ " NPT outlets as an option. Please state requirements on application.

RECEPTACLE VOLTAGE OPERATION

20 Amp units can be supplied in 125v AC max, 250v max or 277v AC max. A NEMA 5-20R configuration is supplied on 20 Amp 125v AC max units. 20 Amp 250v AC max units are supplied with a NEMA 6-20R configuration.

SWITCHES

Single and double pole switches are available in 20 Amp 277v AC max. Three pole switches are available in 20 Amp 600v AC max. Three way and four way switches are available in 15 Amp 277v AC or 20 Amp 277v AC max.

ORDERING REFERENCES

MARINE INSIDE TYPE SWITCHES AND RECEPTACLES						
DESCRIPTION	AMP	VOLTAGE	MARINE BRASS WT (lbs)	MARINE BRASS TYPE	ALUMINUM TYPE	NON-METALLIC TYPE
Blank Box with Cover	N/A	N/A	1.8	2700B	2700A	N/A
One Rectangular Face Single Receptacle	20	125v AC Max	2.0	2704B-125	2704A-125	2704PL-125
One Rectangular Face Double Receptacle	20	125v AC Max	2.0	2705B-125	2705A-125	2705PL-125
One Round Face Single Receptacle	20	125v AC Max	2.0	2753B-125	2753A-125	2753PL-125
Two Semi-Oval Face Receptacle	20	125v AC Max	2.0	2754B-125	2754A-125	2754PL-125
One Single Pole Switch	15 20	120-277v AC 277v AC Max	2.0 2.0	2711B 2722B	2711A 2722A	2711PL 2722PL
One Double Pole Switch	15 20	120-277v AC 277v AC Max	2.0 2.0	2712B 2723B	2712A 2723A	2712PL 2723PL
One Three Pole Switch	15 20 30	120-277v AC 600v AC Max 250v AC Max	2.0 2.0 2.0	2713B 2735B	2713A 2735A	2713PL 2735PL
One Three Way Switch	20	277v AC Max	2.0	2724B	2724A	2724PL
One Four Way Switch	20	277v AC Max	2.0	2725B	2725A	2725PL

SPARE PARTS

COVERS		FLUSH COVERS			
MARINE BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL)		MARINE BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL)		20A 125v	20A 250v
One Square Face Single or Double Receptacle	INX6559B/A/PL	One Square Face Single or Double Receptacle		INX6560B/A/PL	
One Round Face Receptacle	INX6684B/A/PL	One Round Face Receptacle		INX6688B/A/PL	
Two Semi-Oval Receptacles	INX6685B/A/PL	Two Semi-Oval Receptacles		INX6689B/A/PL	
Switches	INX6561B/A/PL	Switches		INX6562B/A/PL	
Blank Cover	INX6032B/A				
BOXES		RECEPTACLES			
One Square Face Single or Double Receptacle	INX6033B/A/PL	One Square Face GFCI Double Receptacle		INX3329	N/A
One Round Face Receptacle	INX6033B/A/PL	One Square Face Receptacle		INX3277	INX3278
Two Semi-Oval Receptacles	INX6033B/A/PL	One Square Face Double Receptacle		INX3130	INX3131
Switches	INX6033B/A/PL	One Round Face Receptacle		INX3171	INX3172
		Two Semi-Oval Face Receptacles		INX3164	INX3165
SWITCHES		PLUGS			
Single Pole	INX3025	Plug 5-15P	15 Amp	125v AC Max	2503NR-125
Double Pole	INX3038	Plug 5-20P	20 Amp	125v AC Max	2506NR-125
Three Pole	INX3013				
Three Way	INX3041				
Four Way	INX3202				