



## FEATURES

- ▼ Pin and sleeve Pauluhn type plug and receptacles rated for up to 30 Amps.
- ▼ Angle type or straight type 30 Amp 2P3W and 3P4W receptacles.
- ▼ Corrosion resistant enclosures in cast marine brass or copper free aluminum.
- ▼ Units supplied in 125v AC as standard. Other voltage options available in 250v, 277v, 380v, 480v and 600v.
- ▼ Reverse service available.
- ▼ 5 year warranty.

## APPROVALS

- ▼ ABS
- ▼ Type 4X
- ▼ Conforms to IP 66

## APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Salvage/recovery vessels
- ▼ Construction yards

## OPTIONS

To obtain a luminaire with one of the following options listed below add the following suffix (not all options can be combined):

- |                   |                            |
|-------------------|----------------------------|
| ▼ 250v units      | -250 (Replace -125 suffix) |
| ▼ 277v units      | -277 (Replace -125 suffix) |
| ▼ 380v units      | -380 (Replace -125 suffix) |
| ▼ 480v units      | -480 (Replace -125 suffix) |
| ▼ 600v units      | -600 (Replace -125 suffix) |
| ▼ Reverse Service | RS                         |

## DIMENSIONS

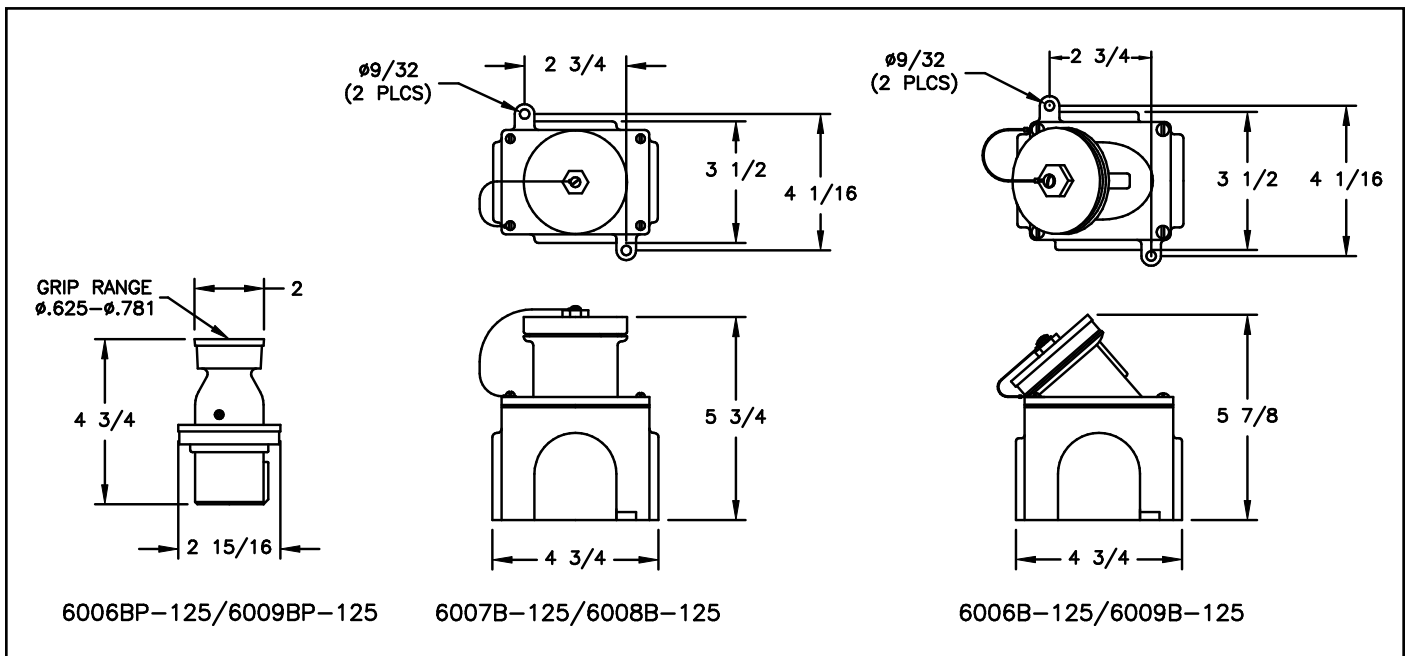

Dimensions in inches



**MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS  
WATERTIGHT 30 AMP RECEPTACLES AND PLUGS**

**TECHNICAL SPECIFICATIONS**

**HOUSING**

Heavy cast marine brass or copper free aluminum with a natural finish.

**HARDWARE**

Stainless steel.

**MOUNTING**

Units are mounted using two  $\frac{9}{32}$ "  $\varnothing$  mounting holes.

**VOLTAGE OPERATION**

Standard units supplied in 30 Amp 120v AC. Options available in 250v, 277v, 380v, 480v and 600v AC.

**RECEPTACLES AND PLUGS**

Pin and sleeve Pauluhn type configurations rated for up to 30 Amps.

**OUTLETS**

All units are furnished blank but can be supplied with up to four 1" NPT outlets. Please state requirements on application.

**ORDERING REFERENCES**

**MARINE WATERTIGHT RECEPTACLES AND PLUGS**

DESCRIPTION	MARINE BRASS WT (lbs)	MARINE BRASS (B) TYPE 2P3W	ALUMINUM (A) TYPE 2P3W	MARINE BRASS (B) TYPE 3P4W	ALUMINUM (A) TYPE 3P4W
Angle Type Receptacle	7.8	6009B-125	6009A-125	6006B-125	6006A-125
Straight Type Receptacle	7.8	6007B-125	6007A-125	6008B-125	6008A-125
Plug	2.8	6009BP-125	6009AP-125	6006BP-125	6006AP-125

**SPARE PARTS**

INTERIORS		RECEPTACLE CAPS		COVER GASKET	
2P3W Receptacle	INX3043	Marine Brass	INX8014B	GKT4005	
3P4W Receptacle	INX3057	Aluminum	INX8014A		
2P3W Plug	INX3073				
3P4W Plug	INX3074				