




USCG	IMO	CE
	12 V 24 V	BA HALOGEN 9s  12 V, 20 W
Special  10 W		

aqua signal 25 CLASSIC - Navigation Lights with stainless steel components.

Application

Application depending on visibility. See table in chapter technical information.

Housing

Polycarbonate black or white, shock resistant, non-corrosive, nonmagnetic, seawater resistant.

Optics

(Fresnel) plastic, shock resistant, seawater resistant; range of visibility 2 nm (Starboard, Port, Bicolor 1 nm)


Protection

IP 45

Electric


2 / 3 wire

1

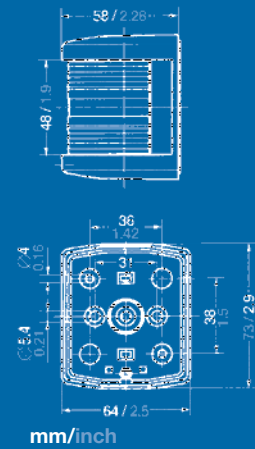


mm/inch

2

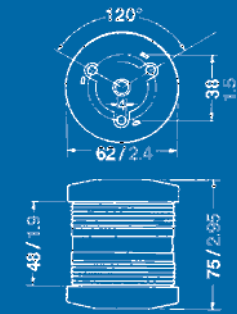





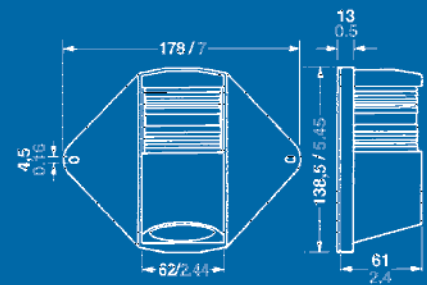




mm/inch

3



mm/inch

Bulb included								
Description	Vessels	Wattage	Visibility	Housing color	12 V 10 W	Housing color	24 V 10 W	
1    	starboard	< 12 m	10 W	1 nm	black	white	25200	
	port	< 12 m	10 W	1 nm	black	white	25300	
	bicolor	< 12 m	10 W	1 nm	black	white	25100	
	masthead	< 12 m	10 W	2 nm	black	white	25400	
2   	all-round white	< 50 m	10 W	2 nm	black	white	25000	
	all-round red	< 50 m	10 W	2 nm	black		25004	
	all-round green	< 50 m	10 W	2 nm	black		25002	
3  	masthead	< 12 m	10 W	2 nm	black		25404	
	foredeck comb.		20 W					

Spare Parts / *Extras

